

# Combi 4 con Multi Timer

FSW302

**KOMPAN**  
Let's play



"Quando ci si allena è importante avere un modo affidabile per tenere traccia del tempo. Il monitoraggio del tempo aggiunge struttura e misurabilità agli allenamenti, il che è molto motivante, ma facilita anche il miglioramento continuo dell'allenamento e quindi il raggiungimento degli obiettivi. Un Multi Timer è facile da vedere mentre ci si allena e fornisce

un segnale acustico e visivo che indica chiaramente quando iniziare e terminare le attività.

Ci sono 5 funzioni di timer 1. Cronometro 2. Tabata Timer (20/10 sec) 3 Interval Timer (30/10 sec) 4. HIIT (40/20 sec) 5. EMOM (60 sec)". EMOM (60 sec)"

Codice articolo FSW30200-0901

## Informazioni generali prodotto

Dimensioni (LxLxA) 416x456x240 cm

Età d'uso 13+

Capacità di gioco 4

Opzioni colori




Maggiori Informazioni sull'App KOMPAN Fit




# Combi 4 con Multi Timer

FSW302

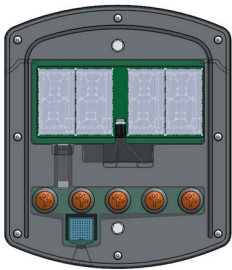

The reflective LCD display has four digits of 100mm height, with excellent outdoor visibility and a wide viewing angle. An LCD display has a low energy consumption, It is powered by 8 replaceable AA batteries with a lifespan of more than 2 years.



Front panels are made of UV-stabilized Polycarbonate. The UV-stabilization prevents the Transparent panels in being yellow over time and ensures the mechanical performances. The graphic prints are added by a unique multi-layer print process where the inner layer is the image and outer transparent layer functions as protection. The lacquer is water-based, and UV stabilized to prevent fading.




The push buttons and the housing for the push buttons are made from Polyamide (PA6). The buttons contain a magnet which activates a contactless reed switch when the buttons are pushed. This ensures high durability of the system.



The connectors are made of die-cast aluminum specially alloyed for outdoor environments and with a lead content below 100ppm. The connectors are attached to the posts by stainless steel screws and well protected against corrosion by special designed zinc washers. Extremely strong and no change of corrosion.



Steel posts are made of Ø101,6 x 2,0mm pre-galvanized steel tube. The posts are powder coated. Tops of posts are sealed with plastic caps (PA6). Footings for surface installation are manufactured from Carbon steel with hot-dip galvanized surface according to ISO1461.

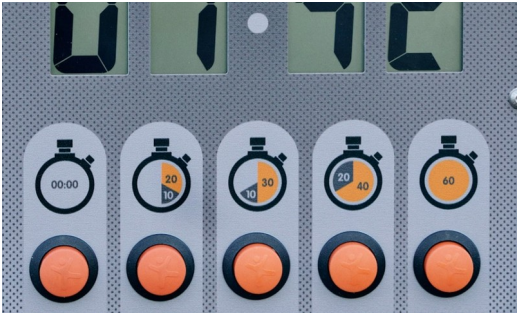

There are 5 timer functions1. Stopwatch 2. Tabata Timer (20/10 sec)3 Interval Timer (30/10 sec)4. HIIT (40/20 sec)5. EMOM (60 sec)

Codice articolo FSW30200-0901	
Informazione installazione	
Max. altezza di caduta	233 cm
Superficie di sicurezza	42,4 m²
Tempo d'installazione totale	9,0
Volume di scavo	0,40 m³
Volume di calcestruzzo	0,12 m³
Profondità di base (standard)	90 cm
Peso della spedizione	370 kg
Opzioni ancoraggio	Interrato ✓ Superficie ✓
Garanzie	
Morsetti in alluminio	10 anni
Parti rivestite in acciaio	10 anni
EcoCore	Garanzia a vita
Componenti elettroniche	2 anni
Garanzia pezzi di ricambio	10 anni



# Sustainability Data

FSW302



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
FSW30200-0901	824,90	3,47	46,80

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



### Verification of CO<sub>2</sub> calculation of: Fitness



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**  
**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

**By Bureau Veritas HSE**  
www.bureauveritas.dk  
+45 7731 1000





# Combi 4 con Multi Timer

FSW302

Altezza di caduta massima | Altezza totale | Superficie di sicurezza

Altezza di caduta massima | Altezza totale

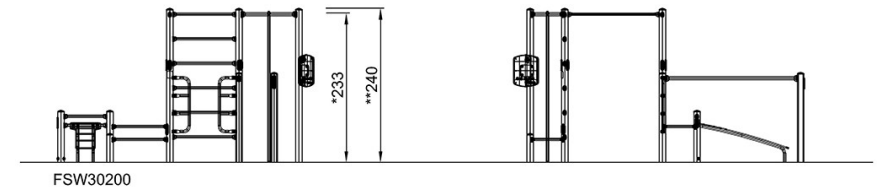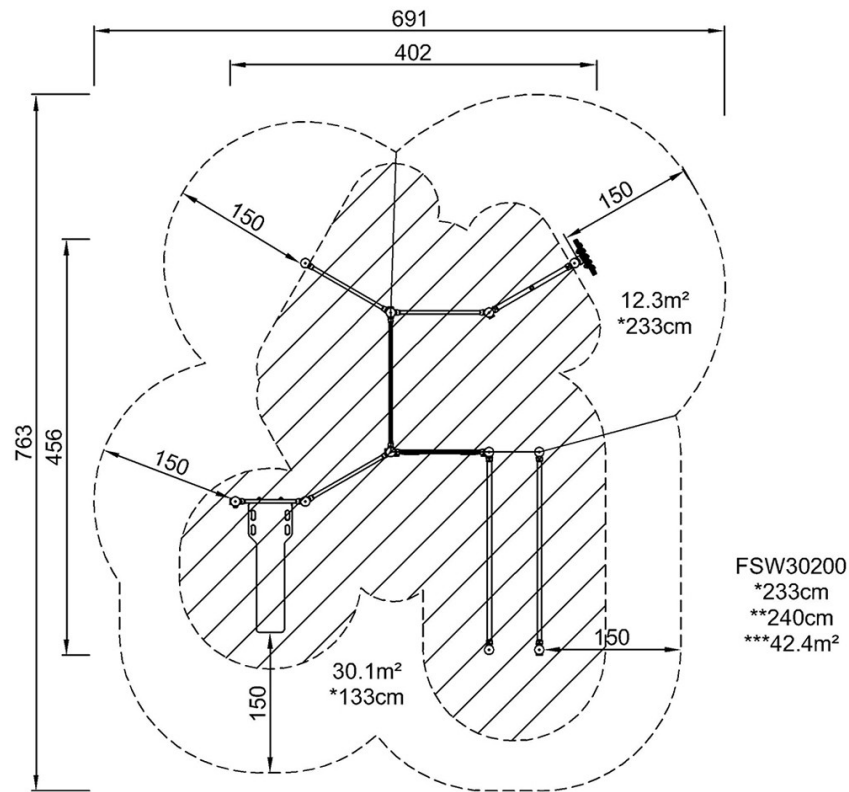

[Fai clic per visualizzare il rapporto VISTA SUPERIORE](#)

[Fai clic per visualizzare il rapporto VISTA LATERALE](#)