
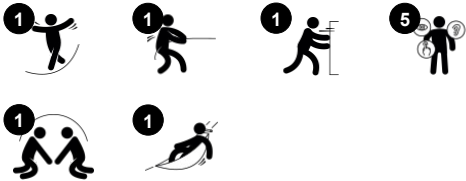


Hammock with galvanised posts

PCM805



Item no. PCM805-1001	
General Product Information	
Dimensions LxWxH	396x77x138 cm
Age group	3+
Play capacity (users)	2
Colour options	



Children can choose to sway mildly or wildly and can lie, be seated, or even stand in the Rope Hammock. Children of all abilities will take joy in the responsiveness and social interaction in the hammock. Pushing and pulling their friends from side to side is fun and builds arm strength. The swaying motion supports important motor skills such as the

sense of balance and the sense of space. The rhythmic movements support the understanding of rhythm. In combination, these three skills assist the child's ability to navigate space securely, for instance when judging distances and speed in traffic. The sense of balance is fundamental for all other motor skills and helps the child's motor stability: preventing

falls and being able to sit still for longer periods of time



Hammock with galvanised posts

PCM805



Hammock bed

Physical: swaying trains the sense of balance and spatial awareness, important for judging distances and navigating space. **Social-**

Emotional: swaying, sharing and meeting with groups of friends. Trains turn-taking skills



Double ropes

Physical: pushing and pulling others. Holding the ropes support arm muscles. Can be pushed from a wheelchair position.

Hammock with galvanised posts


PCM805



The two posts are made of hot dip galvanized steel with aluminium top caps and optionally with anthracite grey powder coated top finish.



The hammock is made of steel reinforced single braided 16 mm PES ropes. PES has high strength with excellent resistance to abrasion and UV radiation. The rope loops are connected by nylon (PA6) connectors providing a smooth and comfortable hammock.

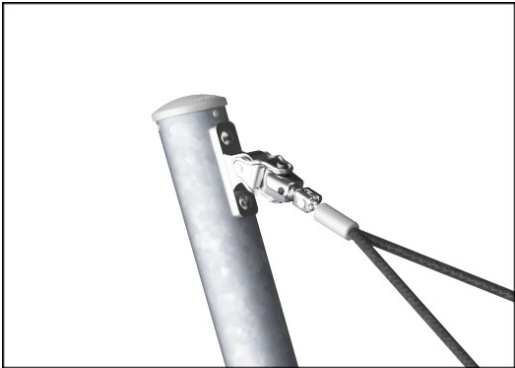


The swing hangers are made of stainless steel brackets and can move over two axis. The flange bearings are silicone enriched to make the suspension maintenance free. At the rope fixation there is a turnable anti twist functions that prevents winding up the ropes.

Item no. PCM805-1001	
Installation Information	
Max. fall height	100 cm
Safety surfacing area	28.0 m²
Total installation time	1.2
Excavation volume	2.00 m³
Concrete volume	1.39 m³
Footing depth (standard)	100 cm
Shipment weight	60 kg
Anchoring options	In-ground ✓
Warranty Information	
EcoCore HDPE	Lifetime
Galvanised Steel	Lifetime
Ropes & Nets	10 years
Spare Parts Guarantee	10 years
Swing Hangers	5 years



Sustainability Data

PCM805

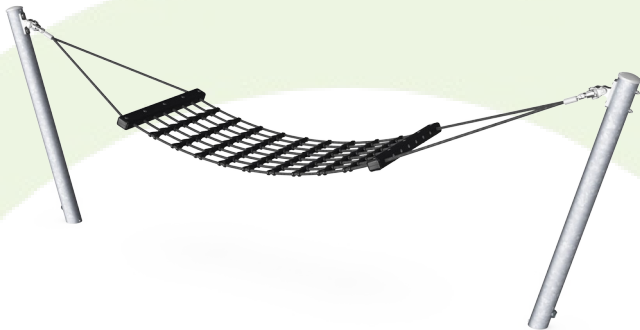

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
PCM805-1001	204.20	3.64	38.30


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S
C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of:
Park

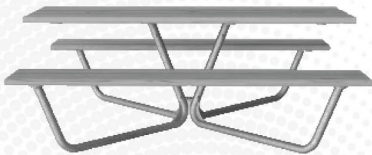

Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Park" represented by item no.: PAR4070-0001.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025
Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





Hammock with galvanised posts

PCM805

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

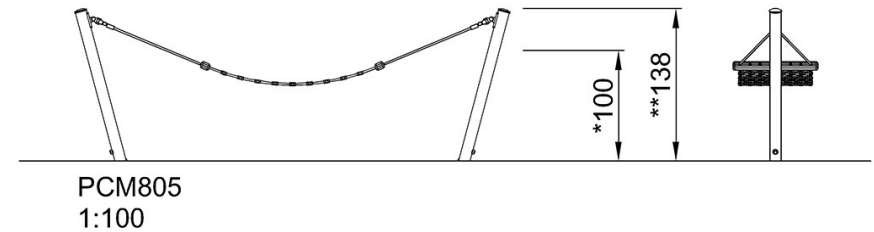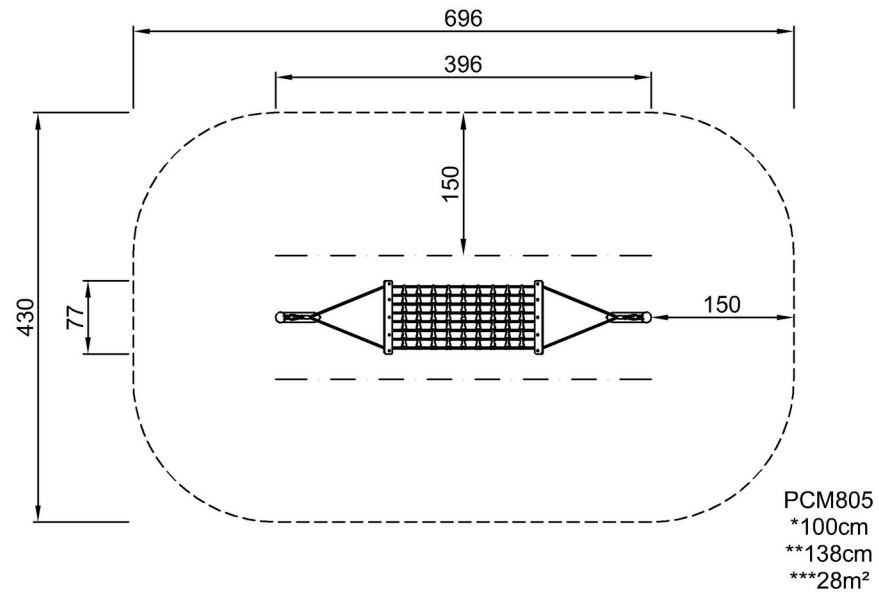

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)