


Two Tower with Tunnel

PCM210121



产品编号 PCM210121-0905	
产品信息概览	
长宽高尺寸	486x309x230 cm
适用年龄段	4+
容纳人数	9
颜色选择	

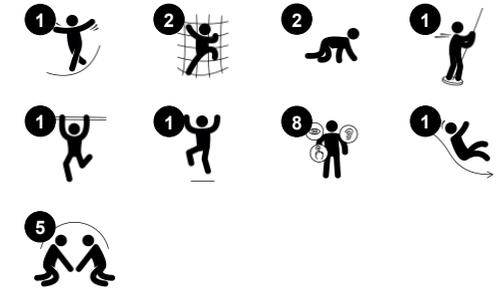

The rich variation of play in the Double Tower & Net Tunnel will inspire play again and again. The graded play events with inclined climbing wall or steel ladder train children's cross-coordination and awareness. The net tunnel is a fun as a crawling and climbing event: the child uses both creeping and stretching to get across. These motor skills helps the body

navigate the world confidently and safely. The fast slide and even faster fireman's pole are hugely thrilling. Additionally they train the child's balance and the posture. These are fundamental for the ability to e.g. sit still and concentrate.

Two Tower with Tunnel

PCM210121



Fireman's pole

身体素质 : coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in early childhood. **社交情感** : 训练轮流意识和风险意识。



攀爬墙

身体素质 : 训练交叉协调能力以及腿部、手臂和手部力量。 **社交情感** : 对年幼的孩子来说,绳网的倾斜度让攀爬更具安全感。



Pipe ladder

身体素质 : cross coordination and eye-hand coordination are supported when children climb the ladder. The climbing also supports leg and arm muscles. **社交情感** : 培养轮流意识和合作意识。



Cave bridge

身体素质 : crawling in the cave bridge net develops cross-body coordination, proprioception and spatial awareness. **社交情感** : 在绳网内外和他人合作、社交互动、轮流意识




滑梯

身体素质 : 玩滑梯可以培养空间感和平衡感。此外,在直立向下坐时,核心肌肉也能得到锻炼。 **社交情感** : 轮流玩耍时可激发同理心。

Two Tower with Tunnel

PCM210121

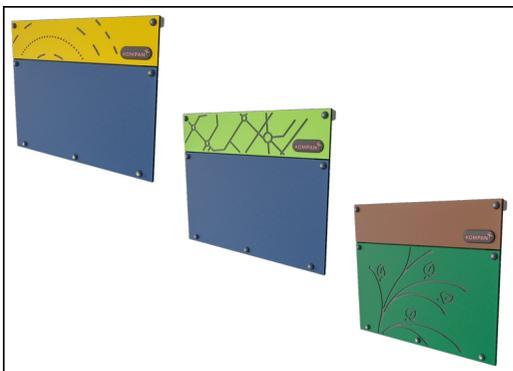


19 毫米 EcoCore™ 面板。EcoCore™ 是一种高度耐用、环保的材料，不仅在使用后可回收利用，而且还包含由 100 % 食品包装可循环材料制成的芯。



所有平台底板均由独特设计的低碳铝型材支撑，并具有多种加配选择。灰色模制平台底板由 75% 消费后的海洋可循环 PP 材料制成，具有防滑图案和表面纹理。



Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.

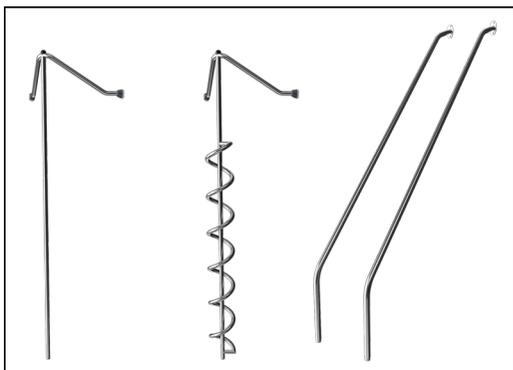

不锈钢游戏活动部件由优质不锈钢制成。在制造后使用酸洗工艺对钢进行清洁，以确保光滑和清洁的顺滑表面。



载玻片可以选择六种不同的颜色和树形材料：直的或弯曲的一体式成型 PE 载玻片。结合 EcoCore™ 侧面和不锈钢。全不锈钢一体式设计，更多防破坏解决方案。



KOMPAN 环保系列产品采用终极环保材料设计，具有最低可能性的二氧化碳排放当量系数。TexMade 立柱，100% 消费后的海洋可循环材料制成的 EcoCore™ 面板和模制 PP 平台底板。

产品编号 PCM210121-0905

安装信息

最大跌落高度	216 cm
安全面积	34.8 m ²
安装总时长	11.5
开挖量	0.55 m ³
混凝土使用量	0.00 m ³
标准入地深度	90 cm
运输重量	363 kg
固定选项	入地 ✓ 地表 ✓

质保信息

EcoCore HDPE	终身质保
立柱	10 年
PP 板	10 年
绳网	10 年
承保零部件	10 年



Sustainability Data

PCM210121



从原材料到成品

CO₂ 排放总量

CO₂ 排放量 / 千克

回收的原料

kg CO₂e

kg CO₂e/kg

%

PCM210121-0951

693.00

2.06

65.20

PCM210121-0905

805.60

3.09

46.00

这些因素采用的总体框架为环保产品声明 (EPD), 该声明可量化“产品生命周期的环保信息, 并对相同功能的产品进行对比” (ISO, 2006)。在遵循该框架的同时, 对从原材料到制造的整个产品阶段 (A1-A3) 应用生命周期评估法。

Kompan A/S

C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Play systems



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





Two Tower with Tunnel

PCM210121

最大跌落高度 | 总高度 | 安全区域

最大跌落高度 | 总高度

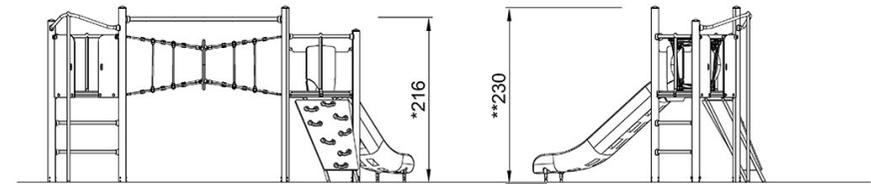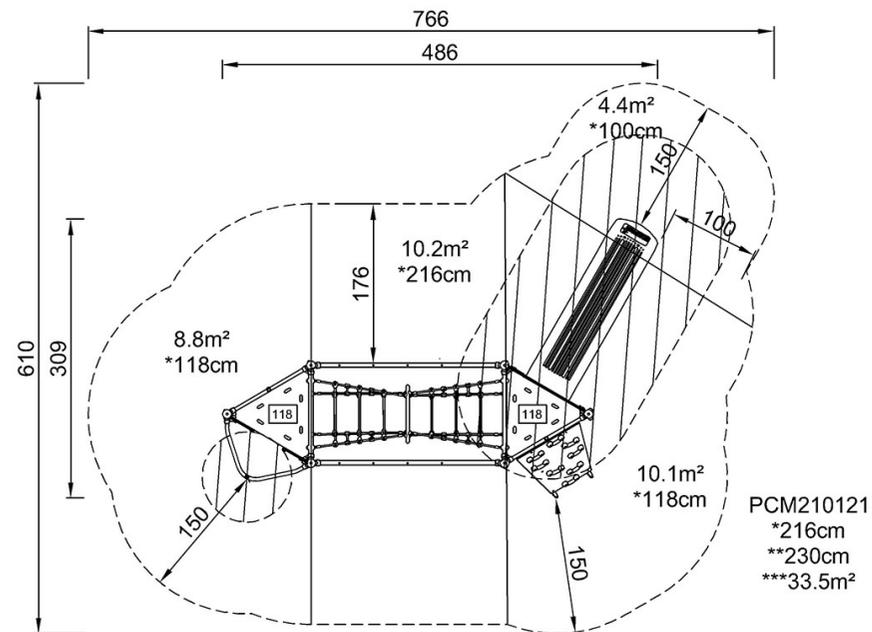

PCM210121

[点击查看俯视图](#)

[点击查看侧面图](#)