

# Sirius II

GXY947





With its quirky look and spinning, bouncing climbing activities, SIRIUS II attracts school-ages children for hours of adventurous play challenges. The curved climbing wall with the colour spot cleats invites a challenging climb to the top. From here, a handle leads to the bouncy play shell seat for a break. The climbing nets allow for seating, too, making this

a fine corner to meet and hang, building on social skills. The spinner invites wild spins for lots of children and the rocking tube provides a really challenging climb up and down. Climbing on the rocking tube not only is great fun, but it also intensely trains the agility, balance, and coordination, the ABC of motor skills in 6-12 year olds. The spinning, apart from being great

fun, helps train balance, a motor skill which is fundamental for e.g. sitting still.

Item no. GXY947032-3717	
General Product Information	
Dimensions LxWxH	363x491x293 cm
Age group	6+
Play capacity (users)	10
Colour options	

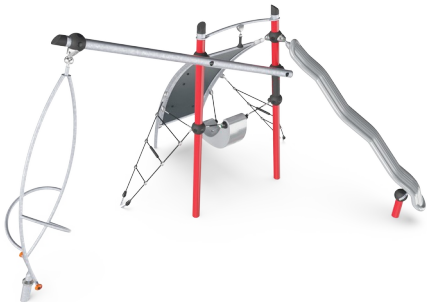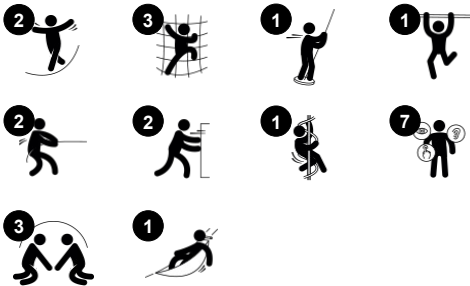

# Sirius II

GXY947



## Teardrop handle

**Physical:** develops upper body muscles, when pulling yourself up or hanging from your arms.



## Rocking tube

**Physical:** muscle strength, balance and coordination when climbing up and down, rocking and holding tight.



## Musca spinner

**Physical:** balance when standing, sitting and rotating, muscles develop when holding tight. **Social-Emotional:** cooperation in getting the spinner to turn.



## Curved climbing wall

**Physical:** children develop their cross-body coordination, proprioception and leg, arm and hand strength. Climbing on a curved surface challenges muscles.



## Play shell

**Physical:** the swaying movement stimulates the sense of balance, necessary to sit still on a chair. **Social-Emotional:** meeting, taking a break and turn-taking are supported, skills necessary to learn how to avoid conflicts.



## Rope ladder

**Physical:** climbing the ladder supports cross coordination and trains leg and arm muscles.

# Sirius II

GXY947



The steel surfaces of GALAXY are hot-dip galvanised inside and outside with lead-free zinc. The galvanisation has excellent corrosion resistance and requires low maintenance.



More substantial play activities are made of 100% recyclable PE. The play shell displayed is moulded in one piece with a minimum 5mm wall thickness. PE has high impact resistance across a wide temperature span which ensures vandal resistance in all locations.



Bearing systems has been designed to be heavy-duty and maintenance free. All steel bearings are fully closed and lifetime lubricated.



The curved climbing wall is manufactured from a steel frame and an Ekogrip® panel with unique designed climbing cleats. The Ekogrip® panel is constructed from a 5mm thick PE base with 3 mm top-layer of rubber with a non-skid effect.



The unique designed GALAXY connection ball is produced with an inner circular core of aluminium surrounded by a shell of hard PP with an outer layer of soft TPV rubber. Flexible lead-free aluminium connectors allow for installation in variable angles.



Galaxy products are available in different colour combinations with either hot-dip galvanised steel surface treatment or a powder-coated finish to selected steel components. Colours of the activities are adjusted to support the individual colour combination.

Item no. GXY947032-3717	
<b>Installation Information</b>	
Max. fall height	252 cm
Safety surfacing area	42.1 m <sup>2</sup>
Total installation time	13.5
Excavation volume	2.22 m <sup>3</sup>
Concrete volume	1.20 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	516 kg
Anchoring options	In-ground ✓ Surface ✓
<b>Warranty Information</b>	
Galaxy connection ball	5 years
Galvanised Steel	Lifetime
PUR Components	10 years
Ropes & Nets	10 years
Spare Parts Guarantee	10 years



# Sustainability Data

GXY947



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>GXY947032-3717</b>	1,150.50	3.06	37.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


**KOMPAN**  
Let's play

## Kompan A/S

C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



## Verification of CO<sub>2</sub> calculation of: Challengers & Climbers



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Challengers & Climbers" represented by item no.: BLX410301-3717.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
www.bureauveritas.dk  
+45 7731 1000





# Sirius II

GXY947

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

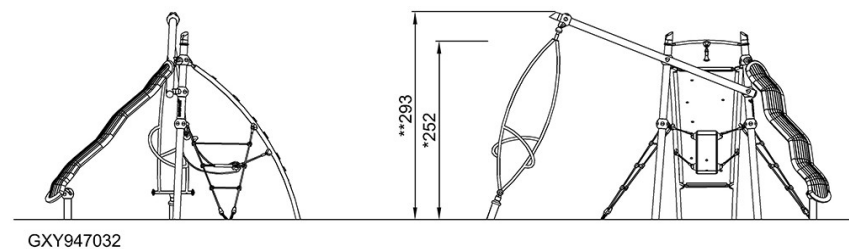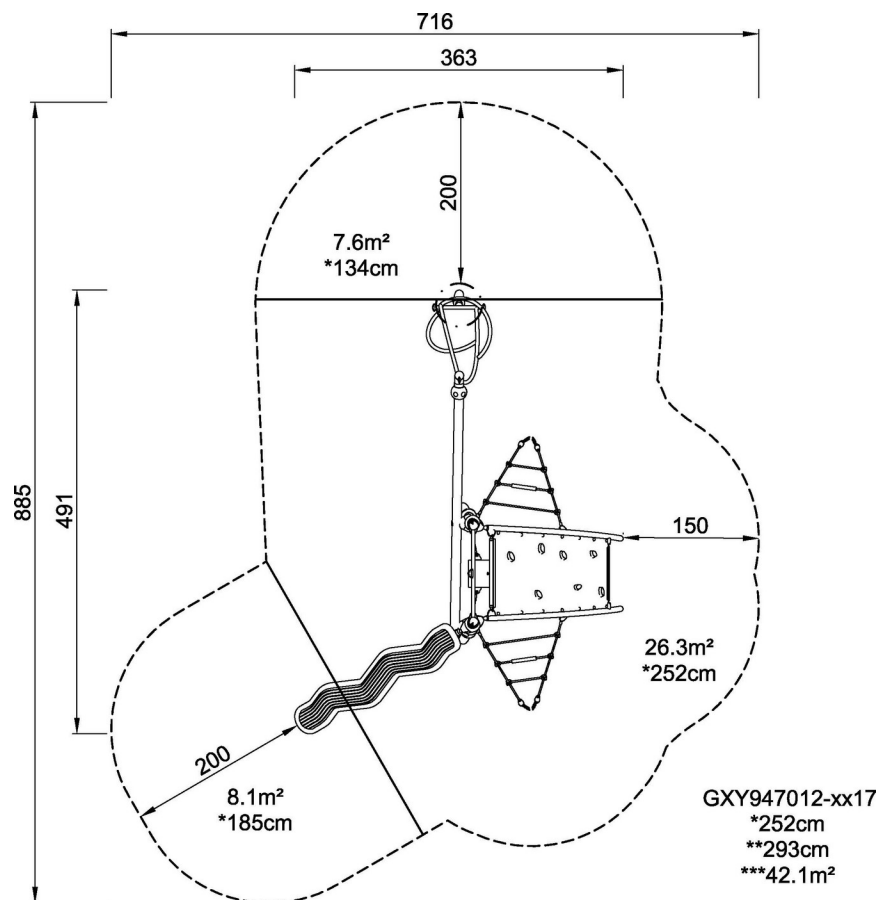

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)