


Octanite

COR45400


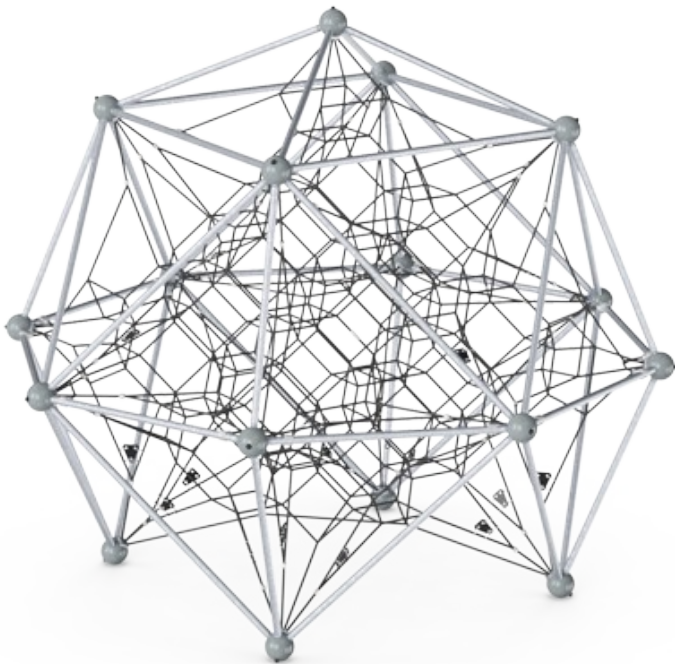


The Octanite attracts children by offering a meandering climbing experience in and on three-dimensional nets. The symmetrical climbing paths are immensely appealing to children. The thrilling open-air action attracts children again and again and makes them want to come back. The bouncy, symmetrical net cubes require concentration when climbing, as

all the movements of other climbers can be felt through the rope movement. These rope vibrations encourage social interaction, cooperation and consideration of others. The nets train important motor skills such as proprioception, spatial awareness and cross-body coordination. These skills are fundamental for risk assessment throughout

life, including, for instance judging and navigating traffic securely. The rich climbing experiences from bottom to top are graded challenges in play, which means this unit has a high play capacity for all abilities.


Item no. COR454001-0406	
General Product Information	
Dimensions LxWxH	17'8"x17'8"x15'1"
Age group	5 - 12
Play capacity (users)	36
Color options	●

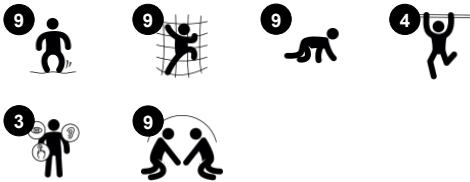



Height

Social-Emotional: children develop courage and self-regulation when being up high. This positively impacts self-confidence.

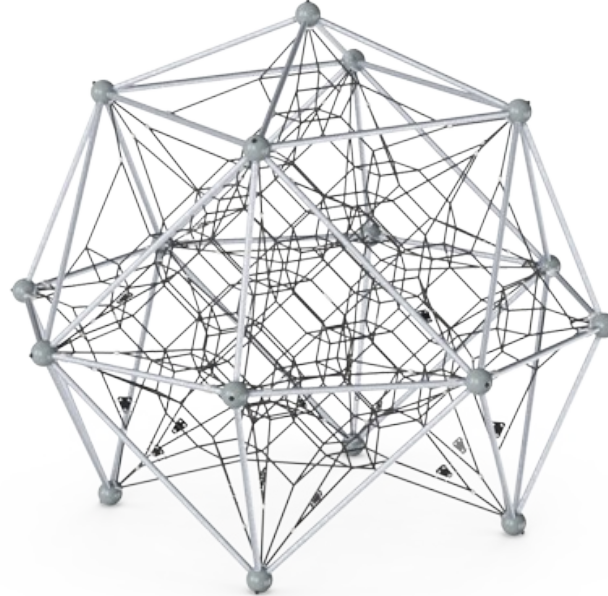

Big meshes

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. **Social-Emotional:** allow more children being seated together, sharing.



Transparency

Social-Emotional: the transparency makes cooperation and communication possible throughout, important life-skills for children to practice.



Connected nets


Physical: the connected nets make the climbers feel the movements of the others, adding a dimension of fun and demanding concentration when holding tight to the rope. Cross-coordination and all muscle groups are trained. **Social-Emotional:** the climbers' movements affect the other climbers, so consideration and turn-taking is supported.



Corocord ropes with 19mm diameter or more are special 'Hercules' - type with galvanized six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.




Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

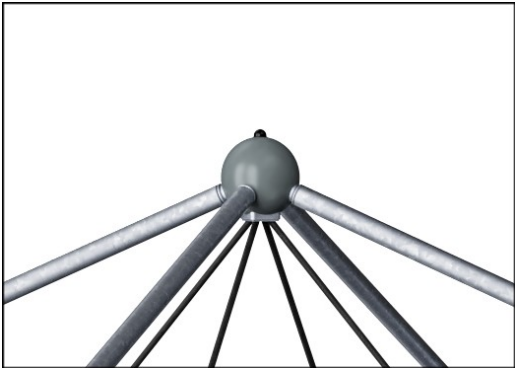


The unique designed connector balls with a diameter of 230mm are made of high quality aluminum with a powder coated top finish. The inside tensioning parts are made of hot dip galvanized steel.


Item no. COR454001-0406	
Installation Information	
Max. fall height	6'8"
Safety surfacing area	648ft²
Total installation time	30.5
Excavation volume	2.3yd³
Concrete volume	1.28yd³
Footing depth (standard)	2'11"
Shipment weight	1897lbs
Anchoring options	In-ground ✓
Warranty Information	
Aluminum clamps	10 Years
Corocord Rope	10 Years
Hot dip galvanized steel	Lifetime
Membrane	2 Years
Spare Parts Availability	10 Years

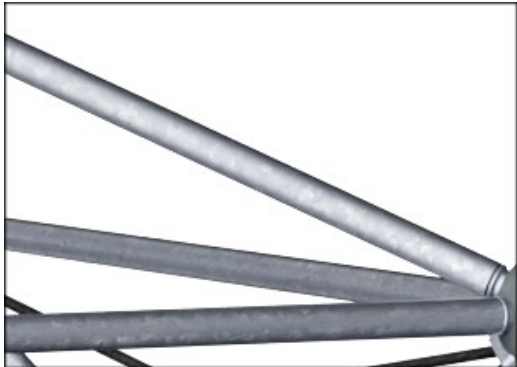

The steel surfaces are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.

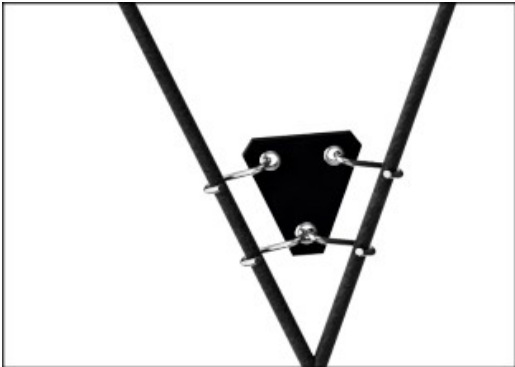

Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.

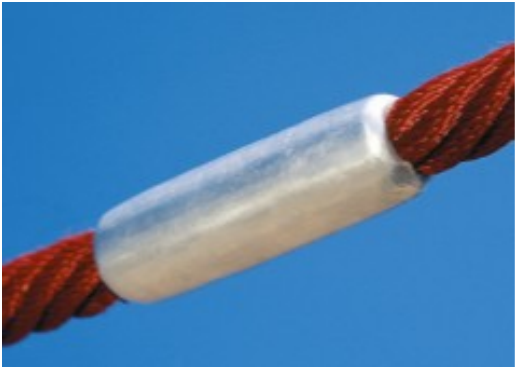


The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1

**ASTM
F1487**
compliant

Sustainability Data

COR45400

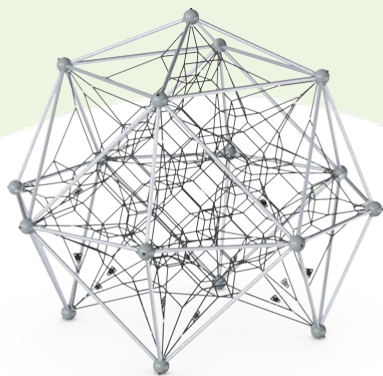

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR454001-0406	2,710.80	3.74	45.20

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025
Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





Octanite

COR45400

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

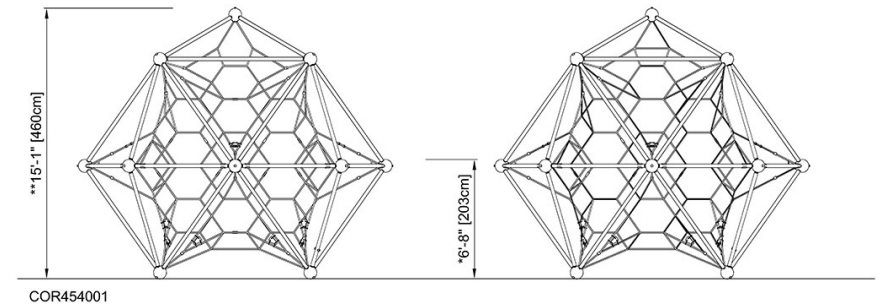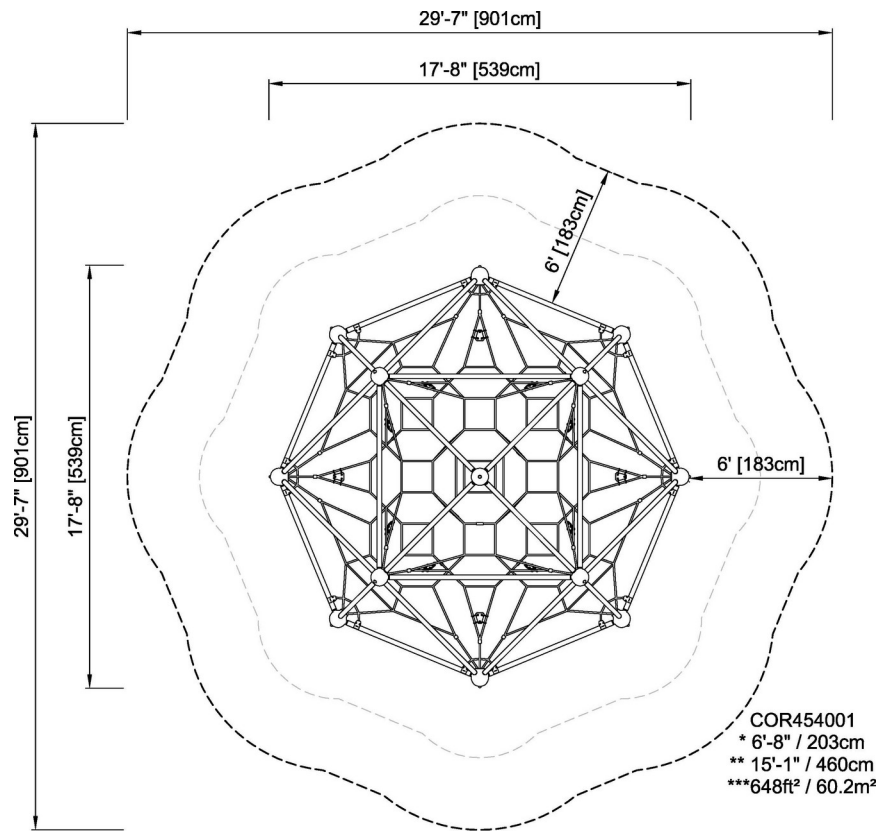

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)