


Argo

GXY8019

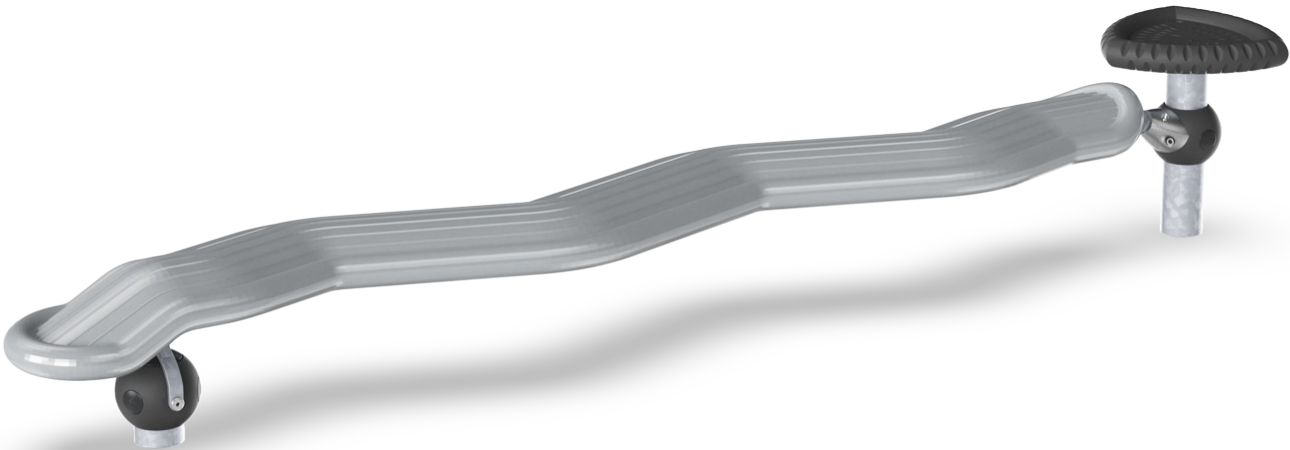

Item no. GXY801912-3717

General Product Information

Dimensions LxWxH	322x48x51 cm
Age group	6+
Play capacity (users)	5
Colour options	 



There is a lot of movement on Argo, the rocking tube where one's sense of balance is challenged. It can be used alone or with others - the children can compete to see who can stay on Argo longest.




Argo

GXY8019



Zig-zag slider

Physical: muscle strength, balance and coordination when climbing up and down, holding tight.

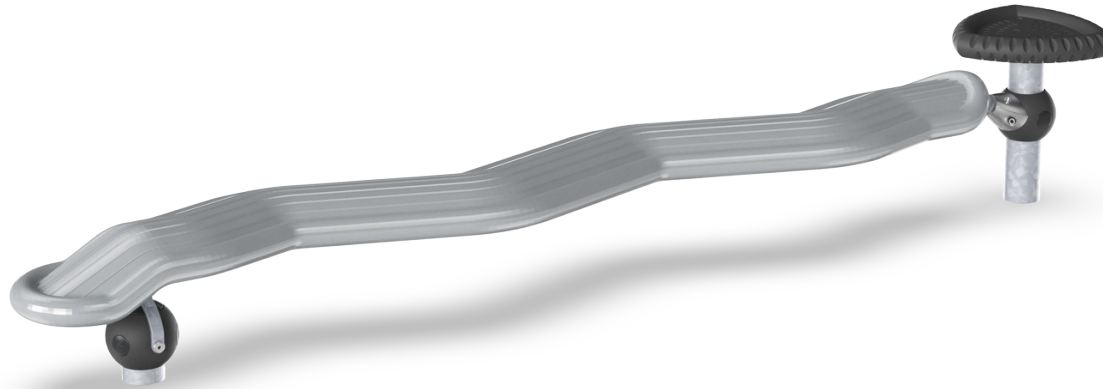




The steel surfaces of GALAXY are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Rocking tube is made of medium density PE with excellent impact strength and usable within a large temperature span. Hollow plastic components are made of 100% recyclable PE made from 33% post-consumer materials. Molded in one piece with minimum 5mm wall thickness. The longitudinal grooves provides a slip resistant surface for safe play.

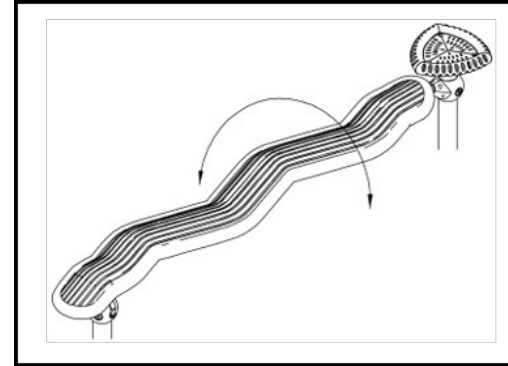

The rocking is supported by a hot dip galvanised Ø76x4mm steel tube. Fixation is done by 5 unique designed impact strengthened nylon (PA6) clamps that allows the rocking tube to flip 25 degrees up and down.



The unique GALAXY super triangle deck plate has an inner core of galvanised steel and soft outer layer of PUR rubber. The rounded edges has a non-skid pattern for safe play.



The hang-on puller is designed with at welded steel core and covered with low-density PE housing. The two rubber coated handles are angled to provide best possible ergonomic while gliding. The wheels of the puller are made of low noise TPU and installed with sealed ball bearings.

Item no. GXY801912-3717

Installation Information

Max. fall height	51 cm
Safety surfacing area	19.7 m²
Total installation time	3.3
Excavation volume	0.86 m³
Concrete volume	0.48 m³
Footing depth (standard)	90 cm
Shipment weight	108 kg
Anchoring options	In-ground ✓ Surface ✓


Warranty Information

Hollow PE parts	10 years
Hot dip galvanised steel	Lifetime
PUR components	10 years
Ropes & nets	10 years
Spare parts guaranteed	10 years



Sustainability Data

GXY8019

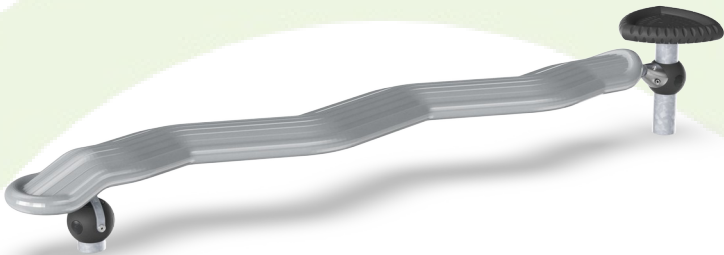

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
GXY801912-3717	231.30	2.71	32.50

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025
Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.


Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

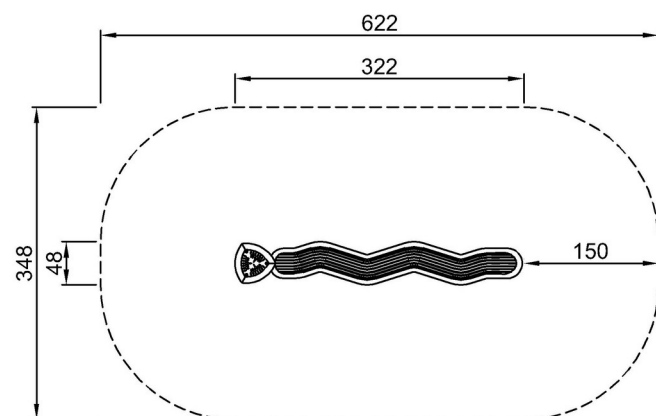

GXY801900-xx17
*51cm
**51cm
***19.7m²



GXY801900

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)