




# Turbo Carousel

PCM161



Item no. PCM161-0901	
General Product Information	
Dimensions LxWxH	7'8"x6'11"x7'7"
Age group	5 - 12
Play capacity (users)	9
Color options	  



The Turbo Carousel is a playground hit that will make children come back again and again. With its responsive rings that rotate around their own axis and around the pole, too, the Turbo Carousel attracts children immediately. The upper body muscles and cores of children are constantly at work when hanging in arms or head down. This trains the upper body muscles

as well as spatial awareness. These skills are important for confidently navigating the body in the world. Jumping down, spinning friends around and making the way up again activate children's motor skills, muscles, cardio and build their bone density. These are developed for life in childhood, so the more they play, the more they gain. The step point support children

of different sizes to access the spinning experience. The rings provide high play capacity, which in turn spurs rough-and-tumble play, cooperation and turn-taking. This builds social-emotional learnings and friendships for life.



# Turbo Carousel

PCM161



## Turbo Spinner

**Physical:** balance, spatial awareness and coordination are developed when spinning around, as well as arm and core muscles when holding tight. Jumping off strengthens bone density, which is built for life in early childhood. **Social-Emotional:** turn-taking, cooperation and empathy are trained when many children are spinning together.




# Turbo Carousel


PCM161




The steel surfaces are hot-dip galvanized inside and outside with lead-free zinc. The galvanization has excellent corrosion resistance in outside environments and requires minimal maintenance.

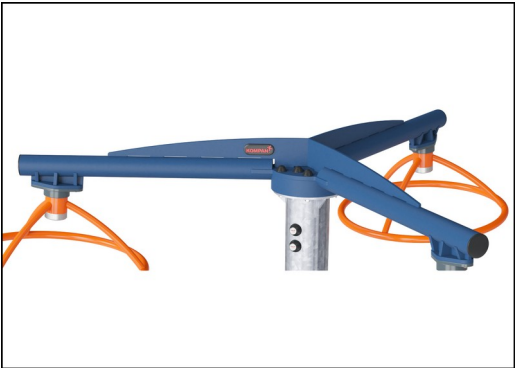

Powder coated top finish on top of galvanization is processed in two steps: Light grinding and clean sweeping, powder coating - thickness 70-120 µm.

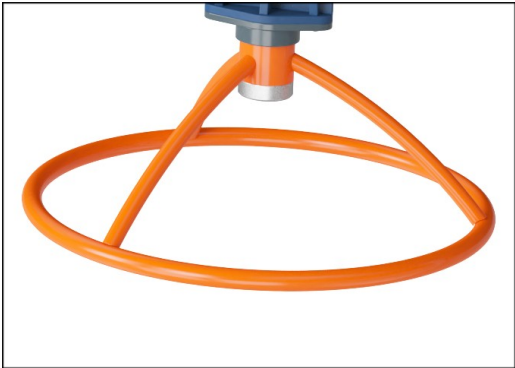

Heavy duty engineered bearing system with two single row deep groove high quality ball bearings with rubber seals. The fully closed bearing construction is lifetime lubricated and located above ground.

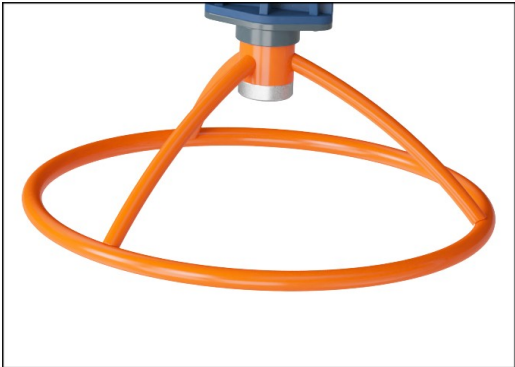

Steps are made of PUR. It retains their properties in the temperature range of -30°C to 60°C. Step is stabilized to a maximum without use of heavy metal stabilities.



Heavy duty engineered bearing system with two single row deep groove high quality ball bearings with rubber seals. The fully closed bearing construction is lifetime lubricated and located above ground.

Item no. PCM161-0901	
Installation Information	
Max. fall height	6'7"
Safety surfacing area	282ft²
Total installation time	3.9
Excavation volume	0.59yd³
Concrete volume	0.16yd³
Footing depth (standard)	2'11"
Shipment weight	537lbs
Anchoring options	Surface ✓ In-ground ✓
Warranty Information	
Hot dip galvanized steel	Lifetime
Painted toplayer	10 Years
PUR components	10 Years
Bearing construction	5 Years
Spare Parts Availability	10 Years

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	0	0



# Sustainability Data

PCM161



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
PCM161-0901	432.30	2.96	46.10

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S  
C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



### Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025  
Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE  
www.bureauveritas.dk  
+45 7731 1000




# Turbo Carousel


PCM161

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

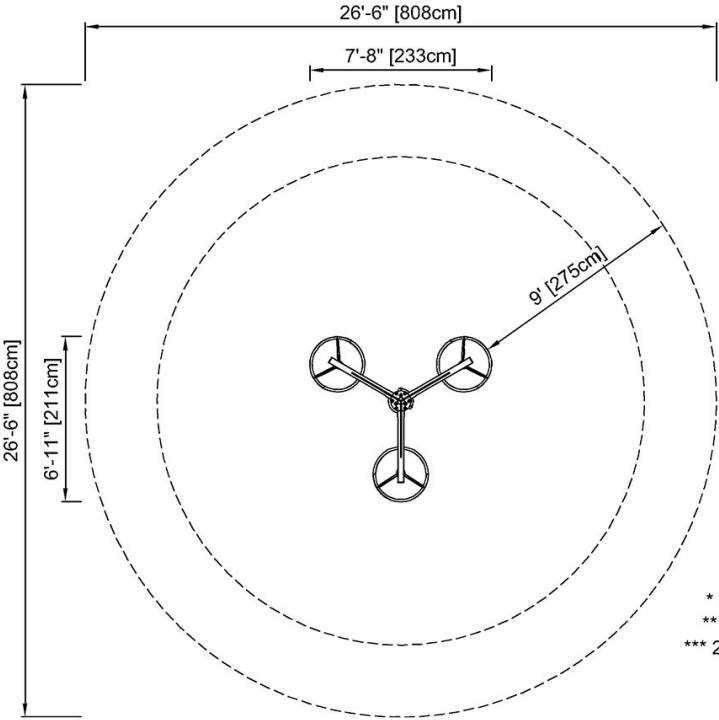

PCM161  
\* 6'-7" / 200cm  
\*\* 7'-7" / 232cm  
\*\*\* 281.1ft² / 26.2m²

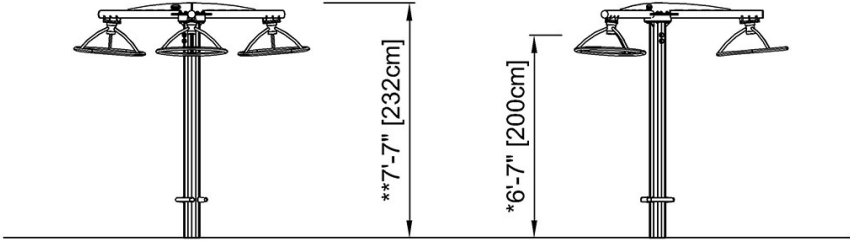

PCM161

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)