

Hill Climber Rope with EPDM, Type 8


COR10548



Item no. COR105481-1101

General Product Information


| | |
|-----------------------|---------------|
| Dimensions LxWxH | 686x22x544 cm |
| Age group | 3+ |
| Play capacity (users) | 13 |
| Colour options | |

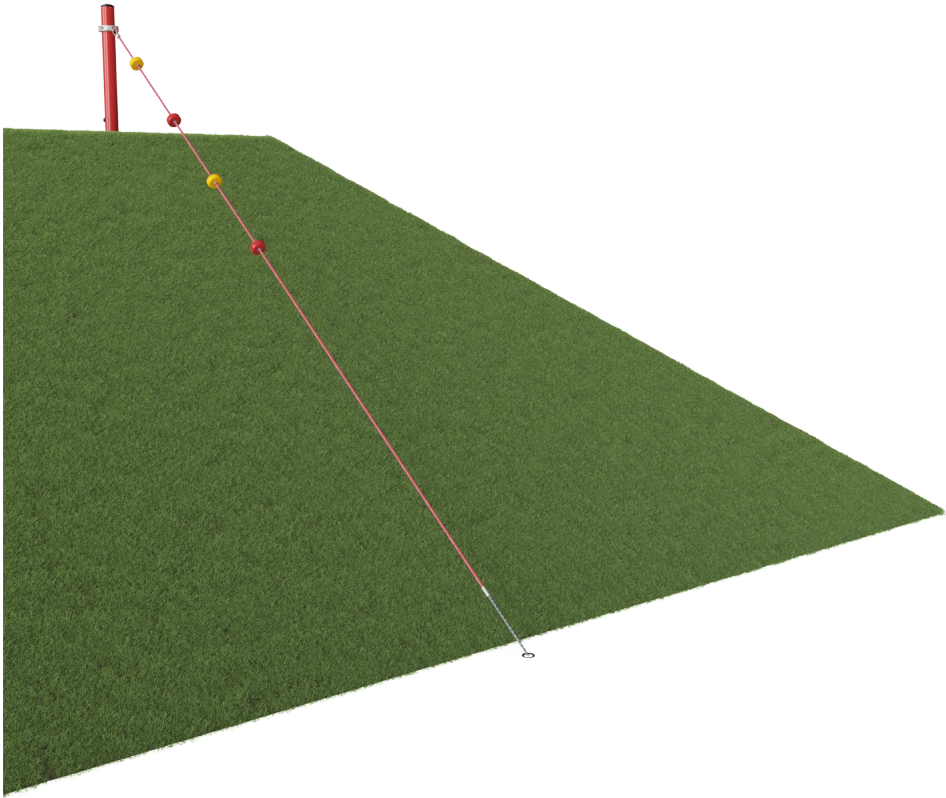

The Hill Climber invites and supports grappling up steep hills. The wonderful combination of stemming the feet onto the hill, holding tight to the rope and leaning back walking upwards is a repeatedly thrilling experience. Apart from being great fun, the combination of movement also provides great motor and muscle training. Hands, arms and upper body get trained when


gripping the perfectly sized rope, legs get trained walking upwards, and core muscles are put to work when leaning back, tensioning the core. The motor skill training is intense: the spatial awareness, the sense of balance and the coordination come to full use. This stimulates the overall motor confidence of the child and helps train the ability to e.g. judge

distances; important in street traffic.

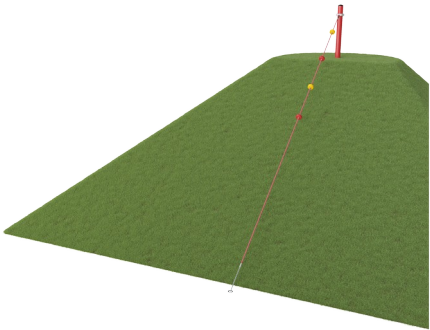


Hill Climber Rope with EPDM, Type 8

COR10548



Hill climber rope with discs

Physical: trains balance, muscle strength and cross coordination, which stimulates cross-modal perception. **Social-Emotional:** the discs define sections so children develop turn-taking and cooperation skills when rappelling.

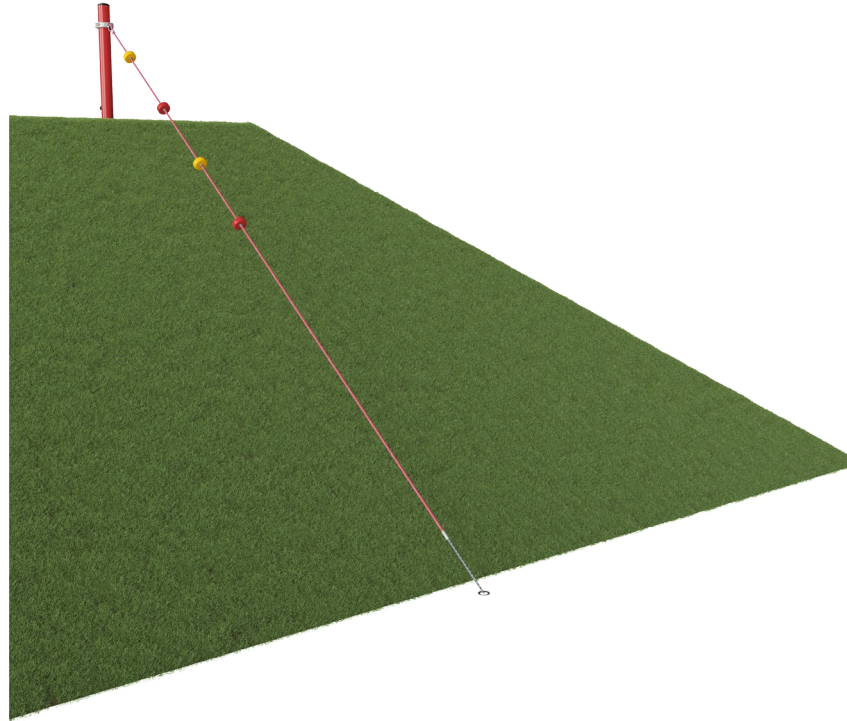

Hill Climber Rope with EPDM, Type 8

COR10548



Corocord ropes with 19mm+ diameter are known as a 'Hercules' rope type which is formed from galvanised six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. Ropes are highly wear-and vandalism-resistant and can be easily replaced on-site if needed.



The metal parts are made from high-quality steel consisting of hot-dip galvanisation on both the inside and outside and also includes lead-free zinc and an additional layer of powder coating. This ensures both excellent corrosion resistance and colourful design expression.



Corocord aluminium clamps are used as connectors between steel posts and rope. Two aluminium castings are bolted together. The height of the clamps is thus variable.




Hill climber ropes are fun and space-saving embankment play solutions which are usable on slopes of 20-60° and available in various lengths.

| | |
|---------------------------------|-------------|
| Item no. COR105481-1101 | |
| Installation Information | |
| Max. fall height | 0 cm |
| Safety surfacing area | 32.6 m² |
| Total installation time | 2.4 |
| Excavation volume | 1.33 m³ |
| Concrete volume | 0.83 m³ |
| Footing depth (standard) | 110 cm |
| Shipment weight | 65 kg |
| Anchoring options | In-ground ✓ |
| Warranty Information | |
| Corocord (Hercules) Rope | 10 years |
| S-Clamps | 10 years |
| EPDM Components | 2 years |
| Spare Parts Guarantee | 10 years |

AS
4685
compliant

Sustainability Data

COR10548

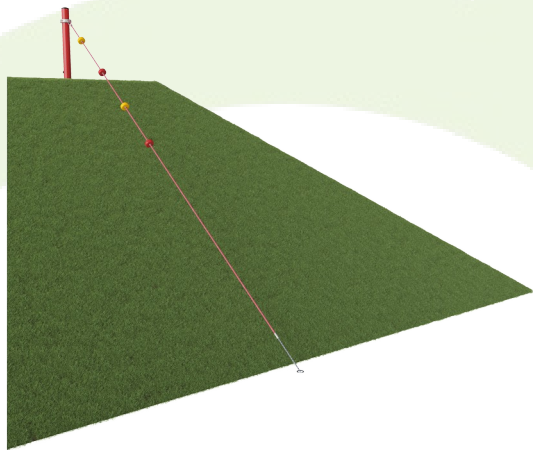

| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| COR105481-1101 | 160.00 | 3.09 | 44.80 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025
Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant


Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000



COR10548



COR105481
Note: Total height (**) is variable

[Click to see SIDE VIEW](#)